



ELECTRICAL MEASUREMENT

Multifunction Meter
Energy Meter
Digital Meter
Analog Meter
Current Transformer

POWER QUALITY

Automatic Power Factor Controller
Capacitor
Advanced Static VAR Generator
Power Quality Hybrid Solution
Static Voltage Regulator


ELECTRICAL PROTECTION & CONTROL

Line Monitoring
Current Monitoring
Motor & Pump Protection
Time Switch
Analog Timer

| ELECTRICAL MEASUREMENT | Page |
|--|-------------|
| • Multifunction Meters | 5 |
| • Plug-N-Wire Multifunction Meters | 6 |
| • Energy Meters | 8 |
| • SELCOM and Communication Gateways | 9 |
| • Digital Panel Meters | 10 |
| • Analog Meters | 12 |
| • Current Transformers | 17 |
| POWER QUALITY | Page |
| • Automatic Power Factor Controllers | 23 |
| • Capacitors | 24 |
| • Advanced Static VAr Generators | 25 |
| • Power Quality Hybrid Solution | 26 |
| • Static Voltage Regulators | 27 |
| ELECTRICAL PROTECTION & CONTROL | Page |
| • Line Monitoring Series | 29 |
| • Current Monitoring Series | 30 |
| • Motor & Pump Protection Relay | 32 |
| • Time Switch & Analog Timers | 33 |
| • Alarm Annunciator | 34 |
| SOLAR | Page |
| • Solar On Grid Inverter | 35 |
| INDUSTRIAL AUTOMATION | Page |
| • MiBRX | 36 |


ENERGY MANAGEMENT *New*

PRICE ON REQUEST



| Device 1 |
|---------------------|
| VLN : 230.48V |
| I : 5.5A |
| 01-03-2018 06:56:35 |
| 8 |
| ACTIVE |

| Device 2 |
|---------------------|
| VLN : 231.48 V |
| I : 4.8 A |
| 01-03-2018 06:59:35 |
| 2 |
| INACTIVE |



Introducing Selec IoT - Our 1st Cloud Based EMS

Selec IoT is a powerful cloud-based energy management solution designed to make your operations simpler, effective and more convenient, enhancing the reliability of your processes and assets. This enables a harmonious network ecosystem of sensors, gateways, and system integrators that enable rapid deployment of real-time applications.

Download our free Energy management app, choose from a variety of subscriptions to meet your needs, or connect with our local experts to implement the solution.

- **Maximize Operational Efficiency**
- **Network Management**
- **Real time Monitoring**
- **Data Logging**
- **Events and Alarms**
- **Dashboard Analysis**
- **Cost Management**
- **Energy Billing**
- **Detailed Reports**
- **User Groups**

MULTIFUNCTION METERS

New



LCD MULTIFUNCTION METER

- Energy Standard - Class 0.5S & Class 1 as per IEC 62053-22 / 21
- Multifunction parameter monitoring (V, A, PF, Hz, W, Wh, VA, VAh, VARh)
- Max Demand & Import / Export measurement
- %THD & Individual harmonics for V & I up to 31st level over communication
- RS485 Communication MODBUS RTU Protocol
- Pulse output
- CE RoHS compliant

| Product Code | Description | HSN Code | Unit MRP |
|------------------------------------|---|----------|----------|
| LCD MULTIFUNCTION METER | | | |
| MFM384-C-D-CE-CL05-Plus New | LCD, High end multifunction meter with RS485 communication, Dual source, Accuracy Class 0.5S, Time-stamped measurements, Displacement PF, Unbalance current & voltage, Configurable Favourite Page, %THD up to 31 st level, 40 to 300V AC / DC | 90303390 | 9990 |
| MFM384-C-CE-CL05 New | LCD multifunction meter with RS485 communication, %THD up to 31 st level, 85 to 300V AC, Accuracy Class 0.5S | | 9213 |
| MFM384-C-CE * # | LCD multifunction meter with RS485 communication, %THD up to 31 st level, 85 to 300V AC | | 7680 |
| MFM384-R-C-CE # | Rail mount LCD multifunction meter with RS485 communication, 85 to 270V AC | | 7680 |
| MFM284-C-CE | LCD multifunction meter with RS485 communication, 72 X 72 mm size, 85 to 270V AC | | 7680 |
| MFM383A-C-CE | LCD multifunction meter with RS485 communication, 85 to 270V AC | | 6144 |
| MFM383A * | LCD multifunction meter, 85 to 270V AC | | 5223 |



LED MULTIFUNCTION METER

- Energy Standard - Class 0.5S & Class 1 as per IEC 62053-22 / 21
- Multifunction parameter monitoring (V, A, PF, Hz, W, Wh, VA, VAh, VARh)
- Max Demand & Import / Export measurement
- %THD & Individual harmonics for V & I up to 31st level over communication
- RS485 Communication MODBUS RTU Protocol
- Pulse output
- CE RoHS compliant

| Product Code | Description | HSN Code | Unit MRP |
|------------------------------------|--|----------|----------|
| LED MULTIFUNCTION METER | | | |
| MFM376-C-D-CE-CL05-Plus New | LED, High end multifunction meter with RS485 communication, Dual source, Accuracy Class 0.5S, Displacement PF, Unbalance current & voltage, Configurable Favourite Page, %THD up to 31 st level, 40 to 300V AC / DC | 90303390 | 6672 |
| MFM376-C-CE-Plus New | LED, High end multifunction meter with RS485 communication, Displacement PF, Unbalance current & voltage, Configurable Favourite Page, %THD up to 31 st level, 40 to 300V AC / DC | | 5818 |
| MFM376-C-CE | LED multifunction meter with RS485 communication, %THD up to 31 st level, 40 to 300V AC / DC | | 5529 |
| MFM376-CE | LED multifunction meter with Import / Export energy measurement, 40 to 300V AC / DC | | 4071 |
| MFM391 | Digital Multifunction Meter with LED display, Measures Voltage, Current, Frequency, Power and Power Factor | | 1918 |

Note: * UL variant available # MID variant available

Price list 2023 (w.e.f. January 24th, 2023)

*Save Time,
Save Money*

PLUG-N-WIRE MULTIFUNCTION METER



PLUG-N-WIRE MULTIFUNCTION METER

- Energy Standard - Class 1 as per IEC 62053-21
- Single and Three phase network compatible, Self-Powered
- RJ45 connector, 330mV output
- Safe to leave transformers on load with output disconnected
- Available as 1 / 2 / 4 channel system, Rail / Panel mount option
- Supplied with or without cables, Accessories to suit requirements
- RS485 Communication MODBUS RTU Protocol
- CE RoHS

| Product Code | Description | HSN Code | Unit MRP |
|---|---|----------|----------|
| PLUG-N-WIRE METER - TIME SAVING SOLUTION | | | |
| MRJ4M-QUAD | Rail mount LCD Plug-N-Wire multifunction meter with RJ45 current input, 4 load monitoring and RS485 communication, 60 to 300V AC | 90303390 | 13338 |
| MRJ4M-SL # | Rail mount LCD Plug-N-Wire multifunction meter with RJ45 current input, Dual load monitoring and RS485 communication, 60 to 300V AC | | 9507 |
| MRJ4M # | Rail mount LCD Plug-N-Wire multifunction meter with RJ45 current input and RS485 communication, 60 to 300V AC | | 7877 |
| MRJ385-G-PNW # | LCD Plug-N-Wire multifunction meter with RJ45 current input, %THD up to 31 st level, RS485 communication, 100 to 240V AC | | 8376 |
| ACCESSORIES - PLUG-N-WIRE | | | |
| POWER & COMMUNICATION CABLE | | | |
| PWCON-F | Voltage connector Female type | 85444299 | 151 |
| PWCON-M | Voltage connector Male type | | 156 |
| PWCBL_CON-F-1 | Power cable with Female type connector, 1 Meter length | | 447 |
| PWCBL_CON-F-3 | Power cable with Female type connector, 3 Meter length | | 933 |
| PWCBL_CON-M/F-1 | Daisy chain cable to loop MRJ meters with Male & Female type connectors, 1 Meter length | | 618 |
| PWCBL_CON-M/F-3 | Daisy chain cable to loop MRJ meters with Male & Female type connectors, 3 Meter length | | 1132 |
| ACH-003 | Cable to connect MRJ Meter with PWCT / PLCT – Both side RJ45 (8Pin) | | 583 |
| ACH-004 | RS485 communication for MRJ4M-QUAD - Both side RJ25 (6Pin) | | 526 |

Note: # MID variant available

Price list 2023 (w.e.f. January 24th, 2023)

| Product Code | Description | HSN Code | Unit MRP |
|--|---|----------|----------|
| POWER & COMMUNICATION CABLE | | | |
| CTV CONVERTER 1A/330 mV | Converter used with PLCTs for MRJ multifunction meter series | 85043100 | 1169 |
| PWADP-1A <i>New</i> | 1A adapter to use with conventional CT for MRJ4M-QUAD meter | | 952 |
| PWADP-5A <i>New</i> | 5A adapter to use with conventional CT for MRJ4M, MRJ4M-SL & MRJ385-G-PNW | | 952 |
| CURRENT TRANSFORMERS & CONVERTERS | | | |
| PLCT 21/25 60 /1A VA 1 CL 3 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | 85043100 | 1341 |
| PLCT 21/25 100 /1A VA 1 CL 3 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | | 1411 |
| PLCT 21/25 125 /1A VA 1.5 CL 1 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | | 1464 |
| PLCT 21/25 150 /1A VA 2.5 CL 0.5 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | | 1507 |
| PLCT 21/25 160 /1A VA 2.5 CL 0.5 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | | 1537 |
| PLCT 21/25 200 /1A VA 3 CL 0.5 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | | 1643 |
| PLCT 21/25 250 /1A VA 3 CL 0.5 | Plug-N-Wire CT used with MRJ multifunction meter series - Needed with CTV Converter | | 1782 |
| PWCT-15/30-60A/330mV | 60A Plug-N-Wire CT (Direct), 15 x 30mm (Window Size) | | 5075 |
| PWCT-15/30-100A/330mV | 100A Plug-N-Wire CT (Direct), 15 x 30mm (Window Size) | | 5075 |
| PWCT-15/30-125A/330mV | 125A Plug-N-Wire CT (Direct), 15 x 30mm (Window Size) | | 5075 |
| PWCT-15/30-160A/330mV | 160A Plug-N-Wire CT (Direct), 15 x 30mm (Window Size) | | 5075 |
| PWCT-16/20-60A/330mV | 60A Plug-N-Wire CT (Direct), 16 x 20mm (Window Size) | | 5075 |
| PWCT-16/20-100A/330mV | 100A Plug-N-Wire CT (Direct), 16 x 20mm (Window Size) | | 5075 |
| PWCT-16/20-125A/330mV | 125A Plug-N-Wire CT (Direct), 16 x 20mm (Window Size) | | 5075 |
| PWCT-16/20-160A/330mV | 160A Plug-N-Wire CT (Direct), 16 x 20mm (Window Size) | | 5075 |
| PWCT-16/20-200A/330mV | 200A Plug-N-Wire CT (Direct), 16 x 20mm (Window Size) | | 5075 |
| PWCT-21/25-60A/330mV | 60A Plug-N-Wire CT (Direct), 21 x 25mm (Window Size) | | 5075 |
| PWCT-21/25-100A/330mV | 100A Plug-N-Wire CT (Direct), 21 x 25mm (Window Size) | | 5075 |
| PWCT-21/25-125A/330mV | 125A Plug-N-Wire CT (Direct), 21 x 25mm (Window Size) | | 5075 |
| PWCT-21/25-160A/330mV | 160A Plug-N-Wire CT (Direct), 21 x 25mm (Window Size) | | 5075 |
| PWCT-21/25-200A/330mV | 200A Plug-N-Wire CT (Direct), 21 x 25mm (Window Size) | | 5075 |
| PWCT-21/25-250A/330mV | 250A Plug-N-Wire CT (Direct), 21 x 25mm (Window Size) | | 5075 |
| PWCT-31/31-250A/330mV | 250A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size) | | 5509 |
| PWCT-31/31-400A/330mV | 400A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size) | | 5509 |
| PWCT-31/31-600A/330mV | 600A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size) | | 5509 |
| PWCT-31/31-630A/330mV | 630A Plug-N-Wire CT (Direct), 31 x 31mm (Window Size) | | 5509 |
| PWCT-54/50-800A/330mV | 800A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size) | | 9206 |
| PWCT-54/50-1000A/330mV | 1000A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size) | | 9206 |
| PWCT-54/50-1250A/330mV | 1250A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size) | | 9206 |
| PWCT-54/50-1600A/330mV | 1600A Plug-N-Wire CT (Direct), 54 x 50mm (Window Size) | | 9206 |

ENERGY METERS



DIRECT MEASURING ENERGY METER

- Energy Standard - Class 1.0 as per IEC 62053-21
- Direct measuring up to 100A
- Multifunction parameter monitoring (V, A, PF, Hz, W, Wh, VA, VAh, VARh, Max Demand & Import / Export Energy)
- 2 Pulse outputs (1st fixed, 2nd Configurable)
- Protocols available : MODBUS RTU variants
- MQTT variant (Wi-Fi)

| Product Code | Description | HSN Code | Unit MRP |
|-------------------------------|--|----------|----------|
| DIRECT MEASURING ENERGY METER | | | |
| EM4M-3P-W-100A <i>New</i> | 3Ø Direct 100A kWh meter, 85 to 285V AC (L-N), 154 to 494V AC (L-L) with built-in Wi-Fi, MQTT protocol | 90303390 | 10752 |
| EM4M-3P-C-100A | 3Ø Direct 100A kWh meter, Self powered, 85 to 285V AC (L-N), 154 to 494V AC (L-L) with RS485 communication | | 8513 |
| EM2M-1P-W-100A <i>New</i> | 1Ø Direct 100A kWh meter, Self powered, 184 to 276V AC with built-in Wi-Fi, MQTT protocol | | 4657 |
| EM2M-1P-C-100A # | 1Ø Direct 100A kWh meter, Self powered, 184 to 276V AC with RS485 communication | | 3448 |



CT OPERATED ENERGY METER

- Energy Standard - Class 1.0 as per IEC 62053-21
- Bright LED / LCD Displays
- RS485 Communication MODBUS RTU Protocol
- Pulse output (EM368-C-CU, EM306)
-

| Product Code | Description | HSN Code | Unit MRP |
|--------------------------|--|----------|----------|
| CT OPERATED ENERGY METER | | | |
| EM368-C-CU | 3Ø kWh meter with LCD display and RS485 communication, 85 to 276V AC, UL certified | 90283010 | 5356 |
| EM306-C-D | 3Ø kWh meter with LED display and RS485 communication, Dual source, 85 to 276V AC | | 3768 |
| EM306 | 3Ø kWh meter with LED display, 85 to 276V AC | | 2999 |



DC ENERGY METER

| Product Code | Description | HSN Code | Unit MRP |
|-------------------|---|----------|----------|
| EM2M-1CH-C-DC-1R0 | Single channel, LED display, 1000V DC & 50mV to 100mV (shunt), Rs485 communication & Relay output | 90283090 | 5405 |
| EM2M-1CH-C-DC-DL | Single channel, LED display, 1000V DC & 50mV to 100mV (shunt), Rs485 communication & Data logging | | 6400 |

Note: # MID variant available

Price list 2023 (w.e.f. January 24th, 2023)


SELCOM

Energy Monitoring


PRICE ON REQUEST




Monitor & Control




Energy Management



Analytics



Dashboards



Alarms

Configure



Local Monitoring



Control

Connect



Installed At:

- Cement Industries
- Education Institutes (Universities)
- Defence Sectors
- FMCG Companies
- Textile & Automobile Industries
- Food Processing Industries



FREE PC based software for monitoring 6 slave devices on USB port.

| Product Code | Description | HSN Code | Unit MRP |
|----------------------------|--|----------|------------|
| ENERGY MANAGEMENT SOFTWARE | | | |
| SELCOM | Front - End Software of Meters of Communication Type (Desktop based) | 85238020 | On Request |
| COMMUNICATION GATEWAYS | | | |
| AC-S2E-02 | Converter – RS485 to Ethernet | 84715000 | 5913 |
| AC-USB-RS485-02 | Converter Cable – USB to RS485 (2 wire) | | 5699 |
| AC-S2W-01-CE <i>New</i> | Converter – RS485 to WiFi | | 3632 |

Price list 2023 (w.e.f. January 24th, 2023)

DIGITAL PANEL METERS



DIGITAL PANEL METER - MULTIFUNCTION SERIES

- True RMS measurement of voltage, current, power, power factor & frequency
- 1Ø & 3Ø measurement available with LCD and LED display
- Models available with Built in CT for 30A and 80A measurement (800A measurement with converter)
- Models available with Plug-N-play RJ45 CT connection
- RS485 MODBUS communication with alarm relay (MX300-1-C-CE)
- CE RoHS compliant

| Product Code | Description | HSN Code | Unit MRP |
|--|--|----------|----------|
| DIGITAL PANEL METER - MULTIFUNCTION SERIES | | | |
| VAF36A-230-CE * | 3Ø Digital meter with LCD display, Built in RPM / RUN hour measurement, 230V AC, 96 x 96 mm size | 90303310 | 4240 |
| VAF39A-1-230V | 3Ø Digital meter with LED display, Built in RPM / RUN hour measurement, 230V AC, 96 x 96 mm size | | 2040 |
| MVA593-CE | 3Ø VA meter up to 800A current measurement using external CT, CE certified, 48 x 48 mm size | | 1586 |
| MX300-1-C-CE | 1Ø Multifunction Digital panel meter with 1 alarm relay output and RS485 modbus communication, 96 x 96 mm size | | 2190 |
| MX300-CE | 1Ø Multifunction Digital panel meter with universal auxiliary supply of 85 to 300V AC / DC, 96 x 96 mm size | | 1484 |
| MVA591-80A-230V | 1Ø VA meter with measurement up to 80A with built in CT, 48 x 48 mm size | | 1256 |
| MVA591-30A-230V | 1Ø VA meter with measurement up to 30A with built in CT, 48 x 48 mm size | | 1210 |



ACCESSORIES - DPM MULTIFUNCTION SERIES

- CT modules available in 1Ø & 3Ø for 80A and 250A measurement
- Converter with DIP switch for CT primary selection
- Up to 800A measurement with converter
- Plug-N-Play RJ45 connection

| Product Code | Description | HSN Code | Unit MRP |
|--|--|----------|----------|
| ACCESSORIES - DPM MULTIFUNCTION SERIES | | | |
| CT 3PH-21x25mm-250A-G | CT for MVA593 - 3 phase, 250A | 85043100 | 1393 |
| CT 3PH-D13mm-80A-G | CT for MVA593 - 3 phase, 80A | | 811 |
| 3PH 5A CONVERTER-G | Converter for MVA593 to be used along with conventional CT | | 723 |
| CT 1PH-30x10mm-250A-G | CT for MVA593 - 1 phase, 250A | | 718 |
| CT 1PH-D13mm-80A-G | CT for MVA593 - 1 phase, 80A | | 500 |


Note: * UL variant available

Price list 2023 (w.e.f. January 24th, 2023)

New



DIGITAL PANEL METER - VOLTMETER


- Class 0.5 accuracy
- True RMS voltage measurement
- Available in LCD and LED display
- Analog style bar graph model available
- PT programmable (For three phase variant)
- 

| Product Code | Description | HSN Code | Unit MRP |
|---------------------------------|---|----------|----------|
| DIGITAL PANEL METERS- VOLTMETER | | | |
| MV2307-230V-CE | 3Ø Digital voltmeter with LCD display, Bar graph representation for voltage, 230V AC, 72 x 72 mm size | 90303310 | 1983 |
| MV35-3-G-40/300V-CE <i>New</i> | 3Ø Digital voltmeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size | | 1681 |
| MV334-230V | 3Ø Digital voltmeter with LED display, 230V AC, 96 x 96 mm size | | 1486 |
| MV507-230V-CE | 1Ø Digital voltmeter with LCD display, Bar graph representation for voltage, 230V AC, 48 x 48 mm size | | 1800 |
| MV35-1-G-40/300V-CE <i>New</i> | 1Ø Digital voltmeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size | | 1025 |
| MV15 | 1Ø Digital voltmeter with LED display, 230V AC, 48 x 96 mm size | | 845 |
| MV205 | 1Ø Digital voltmeter with LED display, 230V AC, 72 x 72 mm size | | 845 |
| MV305 | 1Ø Digital voltmeter with LED display, 230V AC, 96 x 96 mm size | | 845 |

New



DIGITAL PANEL METER - AMMETER

- Class 0.5 accuracy
- True RMS voltage measurement
- Available in LCD and LED display
- Analog style bar graph model available
- CT programmable
- 

| Product Code | Description | HSN Code | Unit MRP |
|--------------------------------|---|----------|----------|
| DIGITAL PANEL METERS- AMMETER | | | |
| MA2301-230V-CE | 3Ø Digital ammeter with LCD display, Bar graph representation for current, 230V AC, 72 x 72 mm size | 90303310 | 2068 |
| MA32-3-G-40/300V-CE <i>New</i> | 3Ø Digital ammeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size | | 1681 |
| MA335-230VAC | 3Ø Digital ammeter with LED display, 230V AC, 96 x 96 mm size | | 1681 |
| MA501-230V-CE | 1Ø Digital ammeter with LCD display, Bar graph representation for current, 230V AC, 48 x 48 mm size | | 1547 |
| MA12-20A-AC | 1Ø Digital ammeter with LED display, 20A direct input, 230V AC, 48 x 96 mm size | | 2549 |
| MA12-75mV-DC | 1Ø Digital ammeter with LED display, 75mV DC shunt input, 230V AC, 48 x 96 mm size | | 2425 |
| MA32-1-G-40/300V-CE <i>New</i> | 1Ø Digital ammeter with LED display, Auxiliary supply of 40 to 300V AC/ DC, 96 x 96 mm size | | 1025 |
| MA12 | 1Ø Digital ammeter with LED display, 230V AC, 48 x 96 mm size | | 811 |
| MA202 | 1Ø Digital ammeter with LED Display, 230V AC, 72 x 72 mm size | | 811 |
| MA302 | 1Ø Digital ammeter with LED display, 230V AC, 96 x 96 mm size | | 811 |

ANALOG METERS

ANALOG PANEL METER - VOLTMETER



- True RMS voltage measurement
- Class 1.5 accuracy (Class 1 available)
- Available in 300V and 500V
- Non-Linear Scale
- Knife Edge Pointer
- Grey Lexan Housing
- Panel mount
- CE RoHS

| Product Code | Description | HSN Code | Unit MRP |
|--------------------------------|---|----------|----------|
| ANALOG PANEL METER - VOLTMETER | | | |
| AM-V-2-N | Analog voltmeter, Class 1.5, 300V AC, 72 x 72 mm size | 90303310 | 586 |
| AM-V-2-L | Analog voltmeter, Class 1.5, 500V AC, 72 x 72 mm size | | 599 |
| AM-V-3-N | Analog voltmeter, Class 1.5, 300V AC, 96 x 96 mm size | | 610 |
| AM-V-3-L | Analog voltmeter, Class 1.5, 500V AC, 96 x 96 mm size | | 626 |

ANALOG PANEL METER - AMMETER



- True RMS current measurement
- Class 1.5 accuracy
- Available with 6 times suppression
- Scale interchangeability
- Non-Linear Scale
- Knife Edge Pointer
- Grey Lexan Housing
- Panel mount
- CE RoHS

| Product Code | Description | HSN Code | Unit MRP |
|--|--|----------|----------|
| ANALOG PANEL METER - AMMETER - CT OPERATED | | | |
| AM-I-2-5A-6S-WD | Analog ammeter without dial plate, 5AAC, Class 1.5, 6S suppressed scale, 72 x 72 mm size | 90303310 | 584 |
| AM-I-2-5A-WD | Analog ammeter without dial plate, Class 1.5, 5AAC, 72 x 72 mm size | | 584 |
| AM-I-3-5A-6S-WD | Analog ammeter without dial plate, 5AAC, Class 1.5, 6S suppressed scale, 96 x 96 mm size | | 533 |
| AM-I-3-5A-WD | Analog ammeter without dial plate, Class 1.5, 5AAC, 96 x 96 mm size | | 533 |
| ANALOG PANEL METER - AMMETER - DIRECT TYPE | | | |
| AM-I-D-2-20A | Analog ammeter, Class 1.5, 20AAC direct input, 72 x 72 mm size | 90303310 | 621 |
| AM-I-D-2-30A | Analog ammeter, Class 1.5, 30AAC direct input, 72 x 72 mm size | | 621 |
| AM-I-D-2-50A | Analog ammeter, Class 1.5, 50AAC direct input, 72 x 72 mm size | | 621 |
| AM-I-D-2-60A | Analog ammeter, Class 1.5, 60AAC direct input, 72 x 72 mm size | | 621 |

| Product Code | Description | HSN Code | Unit MRP |
|---------------|--|----------|----------|
| AM-I-D-2-80A | Analog ammeter, Class 1.5, 80A AC direct input, 72 x 72 mm size | 90303310 | 690 |
| AM-I-D-2-100A | Analog ammeter, Class 1.5, 100A AC direct input, 72 x 72 mm size | | 690 |
| AM-I-D-3-20A | Analog ammeter, Class 1.5, 20A AC direct input, 96 x 96 mm size | | 571 |
| AM-I-D-3-30A | Analog ammeter, Class 1.5, 30A AC direct input, 96 x 96 mm size | | 668 |
| AM-I-D-3-50A | Analog ammeter, Class 1.5, 50A AC direct input, 96 x 96 mm size | | 668 |
| AM-I-D-3-60A | Analog ammeter, Class 1.5, 60A AC direct input, 96 x 96 mm size | | 742 |
| AM-I-D-3-80A | Analog ammeter, Class 1.5, 80A AC direct input, 96 x 96 mm size | | 742 |
| AM-I-D-3-100A | Analog ammeter, Class 1.5, 100A AC direct input, 96 x 96 mm size | | 742 |



ANALOG PANEL METER - POWER FACTOR

- Class 1.5 accuracy
- 0.5 CAP to 0.5 IND measurement
- Non-Linear Scale
- Knife Edge Pointer
- Grey Lexan Housing
- Panel mount
-

| Product Code | Description | HSN Code | Unit MRP |
|--|---|----------|----------|
| ANALOG PANEL METER - POWER FACTOR | | | |
| AM-PF-3-3P1E-0.5 CAP-1-0.5 IND-415V-5A | Analog power factor meter, Class 1.5, 0.5 CAP - 0.5 IND, 415V AC, 96 x 96 mm size | 90303310 | 1048 |
| AM-PF-2-3P1E-0.5 CAP-1-0.5 IND-415V-5A | Analog power factor meter, Class 1.5, 0.5 CAP - 0.5 IND, 415V AC, 72 x 72 mm size | | 1048 |
| AM-PF-3-3P1E-0.5 CAP-1-0.5 IND-440V-5A | Analog power factor meter, Class 1.5, 0.5 CAP - 0.5 IND, 440V, 96 x 96 mm size | | 1048 |
| AM-PF-2-3P1E-0.5 CAP-1-0.5 IND-440V-5A | Analog power factor meter, Class 1.5, 0.5 CAP - 0.5 IND, 440V, 72 x 72 mm size | | 1048 |



ANALOG PANEL METER - FREQUENCY METER

- Class 1.0 accuracy
- 45 to 65Hz measurement
- Knife Edge Pointer
- Linear Scale
- Grey Lexan Housing
- Panel mount
-

| Product Code | Description | HSN Code | Unit MRP |
|--------------------------------------|--|----------|----------|
| ANALOG PANEL METER - FREQUENCY METER | | | |
| AM-Hz-3-45-65-440V | Analog frequency meter, Class 1.0, 45-65Hz, 440V AC, 96 x 96 mm size | 90303310 | 1003 |
| AM-Hz-3-45-65-220V | Analog frequency meter, Class 1.0, 45-65Hz, 220V AC, 96 x 96 mm size | | 1003 |
| AM-Hz-2-45-65-440V | Analog frequency meter, Class 1.0, 45-65Hz, 440V AC, 72 x 72 mm size | | 970 |
| AM-Hz-2-45-65-220V | Analog frequency meter, Class 1.0, 45-65Hz, 220V AC, 72 x 72 mm size | | 970 |

ANALOG PANEL METER - ACCESSORIES

| Product Code | Description | HSN Code | Unit MRP |
|----------------------------------|---|----------|----------|
| ANALOG PANEL METER - ACCESSORIES | | | |
| TC-2 | Terminal cover for 72 x 72 Analog meter for Ammeter / Voltmeter / Direct type up to 30A | 39269099 | 53 |
| TC-3 | Terminal cover for 96 x 96 Analog meter Ammeter / Voltmeter / Direct type up to 30A | | 61 |
| TC-D-2 | Terminal cover for 72 x 72 Analog meter for Direct type Ammeter above 30A | | 61 |
| TC-D-3 | Terminal cover for 96 x 96 Analog meter for Direct type Ammeter above 30A | | 64 |

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------------------|---|----------|----------|
| ANALOG PANEL METER - SCALE PLATES | | | |
| SCL-AM-I-2-15/5A | Scale Plate 72 x 72 mm for 15A rating | 90303310 | 54 |
| SCL-AM-I-2-30/5A | Scale Plate 72 x 72 mm for 30A rating | | 54 |
| SCL-AM-I-2-40/5A | Scale Plate 72 x 72 mm for 40A rating | | 54 |
| SCL-AM-I-2-50/5A | Scale Plate 72 x 72 mm for 50A rating | | 54 |
| SCL-AM-I-2-60/5A | Scale Plate 72 x 72 mm for 60A rating | | 54 |
| SCL-AM-I-2-75/5A | Scale Plate 72 x 72 mm for 75A rating | | 54 |
| SCL-AM-I-2-80/5A | Scale Plate 72 x 72 mm for 80A rating | | 54 |
| SCL-AM-I-2-100/5A | Scale Plate 72 x 72 mm for 100A rating | | 54 |
| SCL-AM-I-2-125/5A | Scale Plate 72 x 72 mm for 125A rating | | 54 |
| SCL-AM-I-2-150/5A | Scale Plate 72 x 72 mm for 150A rating | | 54 |
| SCL-AM-I-2-160/5A | Scale Plate 72 x 72 mm for 160A rating | | 54 |
| SCL-AM-I-2-200/5A | Scale Plate 72 x 72 mm for 200A rating | | 54 |
| SCL-AM-I-2-250/5A | Scale Plate 72 x 72 mm for 250A rating | | 54 |
| SCL-AM-I-2-300/5A | Scale Plate 72 x 72 mm for 300A rating | | 54 |
| SCL-AM-I-2-400/5A | Scale Plate 72 x 72 mm for 400A rating | | 54 |
| SCL-AM-I-2-500/5A | Scale Plate 72 x 72 mm for 500A rating | | 54 |
| SCL-AM-I-2-600/5A | Scale Plate 72 x 72 mm for 600A rating | | 54 |
| SCL-AM-I-2-750/5A | Scale Plate 72 x 72 mm for 750A rating | | 54 |
| SCL-AM-I-2-800/5A | Scale Plate 72 x 72 mm for 800A rating | | 54 |
| SCL-AM-I-2-1000/5A | Scale Plate 72 x 72 mm for 1000A rating | | 54 |
| SCL-AM-I-2-1200/5A | Scale Plate 72 x 72 mm for 1200A rating | | 54 |
| SCL-AM-I-2-1250/5A | Scale Plate 72 x 72 mm for 1250A rating | | 54 |
| SCL-AM-I-2-1500/5A | Scale Plate 72 x 72 mm for 1500A rating | | 54 |
| SCL-AM-I-2-1600/5A | Scale Plate 72 x 72 mm for 1600A rating | | 54 |
| SCL-AM-I-2-2000/5A | Scale Plate 72 x 72 mm for 2000A rating | | 54 |
| SCL-AM-I-2-2500/5A | Scale Plate 72 x 72 mm for 2500A rating | | 54 |
| SCL-AM-I-2-3000/5A | Scale Plate 72 x 72 mm for 3000A rating | | 54 |
| SCL-AM-I-2-3200/5A | Scale Plate 72 x 72 mm for 3200A rating | | 54 |
| SCL-AM-I-2-4000/5A | Scale Plate 72 x 72 mm for 4000A rating | | 54 |
| SCL-AM-I-3-15/5A | Scale Plate 96 x 96 mm for 15A rating | | 54 |
| SCL-AM-I-3-30/5A | Scale Plate 96 x 96 mm for 30A rating | | 54 |
| SCL-AM-I-3-40/5A | Scale Plate 96 x 96 mm for 40A rating | | 54 |
| SCL-AM-I-3-50/5A | Scale Plate 96 x 96 mm for 50A rating | | 54 |
| SCL-AM-I-3-60/5A | Scale Plate 96 x 96 mm for 60A rating | | 54 |
| SCL-AM-I-3-75/5A | Scale Plate 96 x 96 mm for 75A rating | | 54 |
| SCL-AM-I-3-80/5A | Scale Plate 96 x 96 mm for 80A rating | | 54 |
| SCL-AM-I-3-100/5A | Scale Plate 96 x 96 mm for 100A rating | | 54 |
| SCL-AM-I-3-125/5A | Scale Plate 96 x 96 mm for 125A rating | | 54 |
| SCL-AM-I-3-150/5A | Scale Plate 96 x 96 mm for 150A rating | | 54 |
| SCL-AM-I-3-160/5A | Scale Plate 96 x 96 mm for 160A rating | | 54 |
| SCL-AM-I-3-200/5A | Scale Plate 96 x 96 mm for 200A rating | | 54 |
| SCL-AM-I-3-250/5A | Scale Plate 96 x 96 mm for 250A rating | | 54 |
| SCL-AM-I-3-300/5A | Scale Plate 96 x 96 mm for 300A rating | 54 | |
| SCL-AM-I-3-320/5A | Scale Plate 96 x 96 mm for 320A rating | 54 | |
| SCL-AM-I-3-400/5A | Scale Plate 96 x 96 mm for 400A rating | 54 | |
| SCL-AM-I-3-500/5A | Scale Plate 96 x 96 mm for 500A rating | 54 | |
| SCL-AM-I-3-600/5A | Scale Plate 96 x 96 mm for 600A rating | 54 | |
| SCL-AM-I-3-700/5A | Scale Plate 96 x 96 mm for 700A rating | 54 | |
| SCL-AM-I-3-750/5A | Scale Plate 96 x 96 mm for 750A rating | 54 | |
| SCL-AM-I-3-800/5A | Scale Plate 96 x 96 mm for 800A rating | 54 | |
| SCL-AM-I-3-1000/5A | Scale Plate 96 x 96 mm for 1000A rating | 54 | |
| SCL-AM-I-3-1200/5A | Scale Plate 96 x 96 mm for 1200A rating | 54 | |

Note: Ordering MOQ - Set of 10 for Scales

Price list 2023 (w.e.f. January 24th, 2023)

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------------------|--|----------|----------|
| ANALOG PANEL METER - SCALE PLATES | | | |
| SCL-AM-I-3-1250/5A | Scale Plate 96 x 96 mm for 1250A rating | 90303310 | 54 |
| SCL-AM-I-3-1500/5A | Scale Plate 96 x 96 mm for 1500A rating | | 54 |
| SCL-AM-I-3-1600/5A | Scale Plate 96 x 96 mm for 1600A rating | | 54 |
| SCL-AM-I-3-2000/5A | Scale Plate 96 x 96 mm for 2000A rating | | 54 |
| SCL-AM-I-3-2500/5A | Scale Plate 96 x 96 mm for 2500A rating | | 54 |
| SCL-AM-I-3-3000/5A | Scale Plate 96 x 96 mm for 3000A rating | | 54 |
| SCL-AM-I-3-3200/5A | Scale Plate 96 x 96 mm for 3200A rating | | 54 |
| SCL-AM-I-3-4000/5A | Scale Plate 96 x 96 mm for 4000A rating | | 54 |
| SCL-AM-I-2-30/5A-6S | Scale Plate 72 x 72 mm for 30A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-40/5A-6S | Scale Plate 72 x 72 mm for 40A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-50/5A-6S | Scale Plate 72 x 72 mm for 50A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-60/5A-6S | Scale Plate 72 x 72 mm for 60A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-75/5A-6S | Scale Plate 72 x 72 mm for 75A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-80/5A-6S | Scale Plate 72 x 72 mm for 80A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-100/5A-6S | Scale Plate 72 x 72 mm for 100A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-125/5A-6S | Scale Plate 72 x 72 mm for 125A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-150/5A-6S | Scale Plate 72 x 72 mm for 150A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-160/5A-6S | Scale Plate 72 x 72 mm for 160A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-200/5A-6S | Scale Plate 72 x 72 mm for 200A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-250/5A-6S | Scale Plate 72 x 72 mm for 250A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-300/5A-6S | Scale Plate 72 x 72 mm for 300A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-400/5A-6S | Scale Plate 72 x 72 mm for 400A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-500/5A-6S | Scale Plate 72 x 72 mm for 500A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-600/5A-6S | Scale Plate 72 x 72 mm for 600A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-800/5A-6S | Scale Plate 72 x 72 mm for 800A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-1000/5A-6S | Scale Plate 72 x 72 mm for 1000A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-1200/5A-6S | Scale Plate 72 x 72 mm for 1200A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-1250/5A-6S | Scale Plate 72 x 72 mm for 1250A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-1500/5A-6S | Scale Plate 72 x 72 mm for 1500A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-1600/5A-6S | Scale Plate 72 x 72 mm for 1600A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-2000/5A-6S | Scale Plate 72 x 72 mm for 2000A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-2500/5A-6S | Scale Plate 72 x 72 mm for 2500A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-3000/5A-6S | Scale Plate 72 x 72 mm for 3000A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-3200/5A-6S | Scale Plate 72 x 72 mm for 3200A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-2-4000/5A-6S | Scale Plate 72 x 72 mm for 4000A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-30/5A-6S | Scale Plate 96 x 96 mm for 30A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-40/5A-6S | Scale Plate 96 x 96 mm for 40A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-50/5A-6S | Scale Plate 96 x 96 mm for 50A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-60/5A-6S | Scale Plate 96 x 96 mm for 60A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-75/5A-6S | Scale Plate 96 x 96 mm for 75A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-80/5A-6S | Scale Plate 96 x 96 mm for 80A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-100/5A-6S | Scale Plate 96 x 96 mm for 100A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-125/5A-6S | Scale Plate 96 x 96 mm for 125A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-150/5A-6S | Scale Plate 96 x 96 mm for 150A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-200/5A-6S | Scale Plate 96 x 96 mm for 200A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-250/5A-6S | Scale Plate 96 x 96 mm for 250A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-300/5A-6S | Scale Plate 96 x 96 mm for 300A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-400/5A-6S | Scale Plate 96 x 96 mm for 400A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-500/5A-6S | Scale Plate 96 x 96 mm for 500A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-600/5A-6S | Scale Plate 96 x 96 mm for 600A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-800/5A-6S | Scale Plate 96 x 96 mm for 800A rating - 6 Times suppressed scale | 54 | |
| SCL-AM-I-3-1000/5A-6S | Scale Plate 96 x 96 mm for 1000A rating - 6 Times suppressed scale | 54 | |

Note: Ordering MOQ - Set of 10 for Scales


Price list 2023 (w.e.f. January 24th, 2023)

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------------------|--|----------|-----------|
| ANALOG PANEL METER - SCALE PLATES | | | |
| SCL-AM-I-3-1200/5A-6S | Scale Plate 96 x 96 mm for 1200A rating - 6 Times suppressed scale | 90303310 | 54 |
| SCL-AM-I-3-1250/5A-6S | Scale Plate 96 x 96 mm for 1250A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-1500/5A-6S | Scale Plate 96 x 96 mm for 1500A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-1600/5A-6S | Scale Plate 96 x 96 mm for 1600A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-2000/5A-6S | Scale Plate 96 x 96 mm for 2000A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-2500/5A-6S | Scale Plate 96 x 96 mm for 2500A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-3000/5A-6S | Scale Plate 96 x 96 mm for 3000A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-3200/5A-6S | Scale Plate 96 x 96 mm for 3200A rating - 6 Times suppressed scale | | 54 |
| SCL-AM-I-3-4000/5A-6S | Scale Plate 96 x 96 mm for 4000A rating - 6 Times suppressed scale | | 54 |

CURRENT TRANSFORMERS



CURRENT TRANSFORMERS - SPLIT CORE

- Protection against unauthorized manipulation of the connections by means of sealable covers
- Nominal Rating ranges from 100A to 6000A
- Snap closing / opening feature
- Non Flammable and self extinguishing.
- Mounting types: Base / Busbar / Wall mount
- 


| Product Code | Description | HSN Code | Unit MRP |
|--|---|----------|------------|
| CURRENT TRANSFORMERS - SPLIT CORE | | | |
| SCCT-30/20-100/5A-VA1-CL1-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 100/5A, Accuracy class 1 | 85043100 | On Request |
| SCCT-30/20-100/5A-VA1.5-CL3-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 100/5A, Accuracy class 3 | | |
| SCCT-30/20-150/5A-VA1-CL0.5-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 150/5A, Accuracy class 0.5 | | |
| SCCT-30/20-150/5A-VA1.5-CL3-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 150/5A, Accuracy class 3 | | |
| SCCT-30/20-200/5A-VA1-CL0.5-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 200/5A, Accuracy class 0.5 | | |
| SCCT-30/20-200/5A-VA1.5-CL1-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 200/5A, Accuracy class 1 | | |
| SCCT-30/20-200/5A-VA2.5-CL3-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 200/5A, Accuracy class 3 | | |
| SCCT-30/20-250/5A-VA1.5-CL0.5-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 0.5 | | |
| SCCT-30/20-250/5A-VA2.5-CL1-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 1 | | |
| SCCT-30/20-250/5A-VA3.75-CL3-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 3 | | |
| SCCT-30/20-300/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 300/5A, Accuracy class 0.5 | | |
| SCCT-30/20-300/5A-VA3.75-CL1-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 1 | | |
| SCCT-30/20-300/5A-VA5-CL3-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 250/5A, Accuracy class 3 | | |
| SCCT-30/20-400/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 400/5A, Accuracy class 0.5 | | |
| SCCT-30/20-400/5A-VA5-CL1-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 400/5A, Accuracy class 1 | | |
| SCCT-30/20-400/5A-VA10-CL3-CE | Split core current transformer. Inner dimensions: 30/20, Rating: 400/5A, Accuracy class 3 | | |
| SCCT-80/50-250/5A-VA1-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 250/5A, Accuracy class 0.5 | | |
| SCCT-80/50-250/5A-VA2.5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 250/5A, Accuracy class 1 | | |
| SCCT-80/50-250/5A-VA3.75-CL3-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 250/5A, Accuracy class 3 | | |
| SCCT-80/50-300/5A-VA1.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 300/5A, Accuracy class 0.5 | | |
| SCCT-80/50-300/5A-VA2.5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 300/5A, Accuracy class 1 | | |
| SCCT-80/50-300/5A-VA5-CL3-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 300/5A, Accuracy class 3 | | |
| SCCT-80/50-400/5A-VA1.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 400/5A, Accuracy class 0.5 | | |
| SCCT-80/50-400/5A-VA2.5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 400/5A, Accuracy class 1 | | |

| Product Code | Description | HSN Code | Unit MRP |
|------------------------------------|---|----------|------------|
| SCCT-80/50-400/5A-VA10-CL3-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 400/5A, Accuracy class 3 | | |
| SCCT-80/50-500/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 500/5A, Accuracy class 0.5 | | |
| SCCT-80/50-500/5A-VA5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 500/5A, Accuracy class 1 | | |
| SCCT-80/50-600/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 600/5A, Accuracy class 0.5 | | |
| SCCT-80/50-600/5A-VA5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 600/5A, Accuracy class 1 | | |
| SCCT-80/50-600/5A-VA15-CL3-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 600/5A, Accuracy class 3 | | |
| SCCT-80/50-750/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 750/5A, Accuracy class 0.5 | | |
| SCCT-80/50-750/5A-VA7.5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 750/5A, Accuracy class 1 | | |
| SCCT-80/50-750/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 750/5A, Accuracy class 3 | | |
| SCCT-80/50-800/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 800/5A, Accuracy class 0.5 | | |
| SCCT-80/50-800/5A-VA7.5-CL1-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 800/5A, Accuracy class 1 | | |
| SCCT-80/50-800/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 80/50, Rating: 800/5A, Accuracy class 3 | | |
| SCCT-80/80-250/5A-VA1.5-CL1-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 250/5A, Accuracy class 1 | | |
| SCCT-80/80-300/5A-VA1.5-CL1-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 250/5A, Accuracy class 1 | | |
| SCCT-80/80-400/5A-VA1.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 400/5A, Accuracy class 0.5 | | |
| SCCT-80/80-500/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 500/5A, Accuracy class 0.5 | | |
| SCCT-80/80-600/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 600/5A, Accuracy class 0.5 | | |
| SCCT-80/80-750/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 750/5A, Accuracy class 0.5 | | |
| SCCT-80/80-800/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 800/5A, Accuracy class 0.5 | | |
| SCCT-80/80-1000/5A-VA5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 1000/5A, Accuracy class 0.5 | | |
| SCCT-120/80-500/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 500/5A, Accuracy class 0.5 | | |
| SCCT-120/80-500/5A-VA3.75-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 500/5A, Accuracy class 1 | | |
| SCCT-120/80-500/5A-VA15-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 500/5A, Accuracy class 3 | 85043100 | On Request |
| SCCT-120/80-600/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 600/5A, Accuracy class 0.5 | | |
| SCCT-120/80-600/5A-VA5-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 600/5A, Accuracy class 1 | | |
| SCCT-120/80-600/5A-VA15-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 600/5A, Accuracy class 3 | | |
| SCCT-120/80-750/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 750/5A, Accuracy class 0.5 | | |
| SCCT-120/80-750/5A-VA2.5-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 750/5A, Accuracy class 1 | | |
| SCCT-120/80-750/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 750/5A, Accuracy class 3 | | |
| SCCT-120/80-800/5A-VA2.5-CL0.5-CE | Split core current transformer. Inner dimensions: 80/80, Rating: 800/5A, Accuracy class 0.5 | | |
| SCCT-120/80-800/5A-VA7.5-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 800/5A, Accuracy class 1 | | |
| SCCT-120/80-800/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 800/5A, Accuracy class 3 | | |
| SCCT-120/80-1000/5A-VA5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1000/5A, Accuracy class 0.5 | | |
| SCCT-120/80-1000/5A-VA10-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1000/5A, Accuracy class 1 | | |
| SCCT-120/80-1000/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1000/5A, Accuracy class 3 | | |
| SCCT-120/80-1200/5A-VA7.5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1200/5A, Accuracy class 0.5 | | |
| SCCT-120/80-1200/5A-VA15-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1200/5A, Accuracy class 1 | | |
| SCCT-120/80-1200/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1200/5A, Accuracy class 3 | | |
| SCCT-120/80-1250/5A-VA7.5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1250/5A, Accuracy class 0.5 | | |
| SCCT-120/80-1250/5A-VA15-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1250/5A, Accuracy class 1 | | |
| SCCT-120/80-1250/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1250/5A, Accuracy class 3 | | |
| SCCT-120/80-1500/5A-VA7.5-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1500/5A, Accuracy class 0.5 | | |
| SCCT-120/80-1500/5A-VA10-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1500/5A, Accuracy class 1 | | |
| SCCT-120/80-1500/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1500/5A, Accuracy class 3 | | |
| SCCT-120/80-1600/5A-VA10-CL0.5-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 800/5A, Accuracy class 0.5 | | |

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------------------|---|----------|------------|
| SCCT-120/80-1600/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1600/5A, Accuracy class 1 | 85043100 | On Request |
| SCCT-120/80-1600/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 120/80, Rating: 1600/5A, Accuracy class 3 | | |
| SCCT-160/80-1000/5A-VA10-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1000/5A, Accuracy class 0.5 | | |
| SCCT-160/80-1000/5A-VA15-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1000/5A, Accuracy class 1 | | |
| SCCT-160/80-1000/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1000/5A, Accuracy class 3 | | |
| SCCT-160/80-1200/5A-VA10-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1200/5A, Accuracy class 0.5 | | |
| SCCT-160/80-1250/5A-VA10-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1250/5A, Accuracy class 0.5 | | |
| SCCT-160/80-1250/5A-VA15-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1250/5A, Accuracy class 1 | | |
| SCCT-160/80-1250/5A-VA20-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1250/5A, Accuracy class 3 | | |
| SCCT-160/80-1500/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1500/5A, Accuracy class 0.5 | | |
| SCCT-160/80-1500/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1500/5A, Accuracy class 1 | | |
| SCCT-160/80-1500/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 1500/5A, Accuracy class 3 | | |
| SCCT-160/80-2000/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 2000/5A, Accuracy class 0.5 | | |
| SCCT-160/80-2000/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 2000/5A, Accuracy class 1 | | |
| SCCT-160/80-2000/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 2000/5A, Accuracy class 3 | | |
| SCCT-160/80-2500/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 2500/5A, Accuracy class 0.5 | | |
| SCCT-160/80-2500/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 2500/5A, Accuracy class 1 | | |
| SCCT-160/80-2500/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 2500/5A, Accuracy class 3 | | |
| SCCT-160/80-3000/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 3000/5A, Accuracy class 0.5 | | |
| SCCT-160/80-3000/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 3000/5A, Accuracy class 1 | | |
| SCCT-160/80-3000/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 3000/5A, Accuracy class 3 | | |
| SCCT-160/80-4000/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 4000/5A, Accuracy class 0.5 | | |
| SCCT-160/80-4000/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 4000/5A, Accuracy class 1 | | |
| SCCT-160/80-4000/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 4000/5A, Accuracy class 3 | | |
| SCCT-160/80-5000/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 5000/5A, Accuracy class 0.5 | | |
| SCCT-160/80-5000/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 5000/5A, Accuracy class 1 | | |
| SCCT-160/80-5000/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 5000/5A, Accuracy class 3 | | |
| SCCT-160/80-6000/5A-VA15-CL0.5-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 6000/5A, Accuracy class 0.5 | | |
| SCCT-160/80-6000/5A-VA20-CL1-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 6000/5A, Accuracy class 1 | | |
| SCCT-160/80-6000/5A-VA30-CL3-CE | Split core current transformer. Inner dimensions: 160/80, Rating: 6000/5A, Accuracy class 3 | | |



CURRENT TRANSFORMER - SQUARE TYPE

- Available range: 30A - 4000A
- ASTA, CE and UL certified
- Applicable with bus bar aperture upto 100mm
- Panel mount / Din rail mount (Requires additional accessory)
- 

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------------------|--------------------------------------|----------|------------|
| CURRENT TRANSFORMER - SQUARE TYPE | | | |
| SPCT-50/30-60/5A-VA1-CL5-CE * | Bus bar CT with 60/5A, OD/ID: 50/30 | 85043100 | On Request |
| SPCT-50/30-75/5A-VA1-CL1-CE * | Bus bar CT with 75/5A, OD/ID: 50/30 | | |
| SPCT-50/30-80/5A-VA1-CL1-CE * | Bus bar CT with 80/5A, OD/ID: 50/30 | | |
| SPCT-50/30-100/5A-VA1-CL1-CE * | Bus bar CT with 100/5A, OD/ID: 50/30 | | |

Note: * UL variant available

Price list 2023 (w.e.f. January 24th, 2023)

| Product Code | Description | HSN Code | Unit MRP |
|-------------------------------------|---|----------|------------|
| SPCT-50/30-125/5A-VA1.25-CL1-CE * | Bus bar CT with 125/5A, OD/ID: 50/30 | 85043100 | On Request |
| SPCT-50/30-160/5A-VA1.5-CL1-CE * | Bus bar CT with 160/5A, OD/ID: 50/30 | | |
| SPCT-50/30-200/5A-VA3-CL1-CE * | Bus bar CT with 200/5A, OD/ID: 50/30 | | |
| SPCT-50/30-250/5A-VA3-CL1-CE * | Bus bar CT with 250/5A, OD/ID: 50/30 | | |
| SPCT-50/30-300/5A-VA5-CL1-CE * | Bus bar CT with 300/5A, OD/ID: 50/30 | | |
| SPCT-50/30-400/5A-VA5-CL1-CE * | Bus bar CT with 400/5A, OD/ID: 50/30 | | |
| SPCT-62/22-30/5A-VA1-CL5-CE * | Bus bar CT with 30/5A, OD/ID: 62/22 | | |
| SPCT-62/30-50/5A-VA1-CL3-CE * | Bus bar CT with 50/5A, OD/ID: 62/30 | | |
| SPCT-62/30-50/5A-VA1.5-CL3-CE * | Bus bar CT with 50/5A, OD/ID: 62/30 | | |
| SPCT-62/30-75/5A-VA1-CL3-CE * | Bus bar CT with 75/5A, OD/ID: 62/30 | | |
| SPCT-62/30-75/5A-VA3-CL3-CE * | Bus bar CT with 75/5A, OD/ID: 62/30 | | |
| SPCT-62/30-100/5A-VA1-CL1-CE * | Bus bar CT with 100/5A, OD/ID: 62/30 | | |
| SPCT-62/30-100/5A-VA3-CL1-CE * | Bus bar CT with 100/5A, OD/ID: 62/30 | | |
| SPCT-62/40-100/5A-VA1-CL1-CE * | Bus bar CT with 100/5A, OD/ID: 62/40 | | |
| SPCT-62/40-125/5A-VA1-CL1-CE * | Bus bar CT with 125/5A, OD/ID: 62/40 | | |
| SPCT-62/40-150/5A-VA1.5-CL1-CE * | Bus bar CT with 150/5A, OD/ID: 62/40 | | |
| SPCT-62/40-150/5A-VA3-CL1-CE * | Bus bar CT with 150/5A, OD/ID: 62/40 | | |
| SPCT-62/40-160/5A-VA1.5-CL1-CE * | Bus bar CT with 160/5A, OD/ID: 62/40 | | |
| SPCT-62/40-200/5A-VA2.5-CL0.5-CE * | Bus bar CT with 200/5A, OD/ID: 62/40 | | |
| SPCT-62/40-200/5A-VA3-CL1-CE * | Bus bar CT with 200/5A, OD/ID: 62/40 | | |
| SPCT-62/40-250/5A-VA2.5-CL0.5-CE * | Bus bar CT with 250/5A, OD/ID: 62/40 | | |
| SPCT-62/40-250/5A-VA3-CL1-CE * | Bus bar CT with 250/5A, OD/ID: 62/40 | | |
| SPCT-62/40-300/5A-VA3-CL0.5-CE * | Bus bar CT with 300/5A, OD/ID: 62/40 | | |
| SPCT-62/40-400/5A-VA3.75-CL0.5-CE * | Bus bar CT with 400/5A, OD/ID: 62/40 | | |
| SPCT-62/40-400/5A-VA5-CL1-CE * | Bus bar CT with 400/5A, OD/ID: 62/40 | | |
| SPCT-100/60-500/5A-VA5-CL1-CE * | Bus bar CT with 500/5A, OD/ID: 100/60 | | |
| SPCT-100/60-600/5A-VA5-CL0.5-CE * | Bus bar CT with 600/5A, OD/ID: 100/60 | | |
| SPCT-100/60-600/5A-VA7.5-CL1-CE * | Bus bar CT with 600/5A, OD/ID: 100/60 | | |
| SPCT-100/60-800/5A-VA10-CL0.5-CE * | Bus bar CT with 800/5A, OD/ID: 100/60 | | |
| SPCT-100/60-1000/5A-VA15-CL0.5-CE * | Bus bar CT with 1000/5A, OD/ID: 100/60 | | |
| SPCT-100/60-1200/5A-VA15-CL0.5-CE * | Bus bar CT with 1200/5A, OD/ID: 100/60 | | |
| SPCT-140/100-800/5A-VA15-CL0.5-CE | Bus bar CT with 800/5A, OD/ID: 140/100 | | |
| SPCT-140/100-1000/5A-VA15-CL0.5-CE | Bus bar CT with 1000/5A, OD/ID: 140/100 | | |
| SPCT-140/100-1200/5A-VA15-CL0.5-CE | Bus bar CT with 1200/5A, OD/ID: 140/100 | | |
| SPCT-140/100-1250/5A-VA15-CL0.5-CE | Bus bar CT with 1250/5A, OD/ID: 140/100 | | |
| SPCT-140/100-1500/5A-VA15-CL0.5-CE | Bus bar CT with 1500/5A, OD/ID: 140/100 | | |
| SPCT-140/100-1600/5A-VA15-CL0.5-CE | Bus bar CT with 1600/5A, OD/ID: 140/100 | | |
| SPCT-140/100-2000/5A-VA15-CL0.5-CE | Bus bar CT with 2000/5A, OD/ID: 140/100 | | |
| SPCT-140/100-2500/5A-VA15-CL0.5-CE | Bus bar CT with 2500/5A, OD/ID: 140/100 | | |
| SPCT-140/100-3000/5A-VA15-CL0.5-CE | Bus bar CT with 3000/5A, OD/ID: 140/100 | | |
| SPCT-140/100-3500/5A-VA15-CL0.5 | Bus bar CT with 3500/5A, OD/ID: 140/100 | | |
| SPCT-140/100-4000/5A-VA15-CL0.5 | Bus bar CT with 4000/5A, OD/ID: 140/100 | | |

Accessory - Square type CT

| | | | |
|------------------|--|----------|------------|
| AC-SPCT-DRAIL-01 | Accessory - Din Rail mounting plate for Busbar CT, Qty 10 no's | 39269099 | On Request |
|------------------|--|----------|------------|

Note: * UL variant available

Price list 2023 (w.e.f. January 24th, 2023)



CURRENT TRANSFORMER - CABLE TYPE

- Available range: 30A - 600A
- Rated Burden: 1.5 /5VA
- Accuracy: Class 1 to 5
- Panel mount

| Product Code | Description | HSN Code | Unit MRP |
|---|---|----------|------------|
| CURRENT TRANSFORMER - CABLE TYPE | | | |
| RCT-T-D30-30/5A-VA1.5-CL5 | Ring type CT with 30/5A, Inner diameter - 30mm | 85043100 | On Request |
| RCT-T-D30-30/5A-VA5-(2T)-CL5 | Ring type CT with 30/5A, Inner diameter - 30mm | | |
| RCT-T-D30-50/5A-VA5-CL5 | Ring type CT with 50/5A, Inner diameter - 30mm | | |
| RCT-T-D30-75/5A-VA5-CL5 | Ring type CT with 75/5A, Inner diameter - 30mm | | |
| RCT-T-D30-100/5A-VA5-CL1 | Ring type CT with 100/5A, Inner diameter - 30mm | | |
| RCT-T-D30-150/5A-VA5-CL1 | Ring type CT with 150/5A, Inner diameter - 30mm | | |
| RCT-T-D50-200/5A-VA5-CL1 | Ring type CT with 200/5A, Inner diameter - 50mm | | |
| RCT-T-D50-250/5A-VA5-CL1 | Ring type CT with 250/5A, Inner diameter - 50mm | | |
| RCT-T-D50-300/5A-VA5-CL1 | Ring type CT with 300/5A, Inner diameter - 50mm | | |
| RCT-T-D50-400/5A-VA5-CL1 | Ring type CT with 400/5A, Inner diameter - 50mm | | |
| RCT-T-D50-500/5A-VA5-CL1 | Ring type CT with 500/5A, Inner diameter - 50mm | | |
| RCT-T-D50-600/5A-VA5-CL1 | Ring type CT with 600/5A, Inner diameter - 50mm | | |



CURRENT TRANSFORMER - TAPE WOUND

- Available range: 30A - 1600A
- Rated Burden: 1.5 /5/10VA
- Accuracy: Class 0.5 to 5

| Product Code | Description | HSN Code | Unit MRP |
|---|--|----------|------------|
| CURRENT TRANSFORMER - TAPE WOUND | | | |
| TWCT-T-D35-30/5A-VA1.5-CL5 | Tape wound CT with 30/5A, Inner diameter - 35mm | 85043100 | On Request |
| TWCT-T-D35-50/5A-VA5-CL5 | Tape wound CT with 50/5A, Inner diameter - 35mm | | |
| TWCT-T-D35-75/5A-VA5-CL5 | Tape wound CT with 75/5A, Inner diameter - 35mm | | |
| TWCT-T-D35-100/5A-VA5-CL1 | Tape wound CT with 100/5A, Inner diameter - 35mm | | |
| TWCT-T-D35-150/5A-VA5-CL1 | Tape wound CT with 150/5A, Inner diameter - 35mm | | |
| TWCT-T-D55-150/5A-VA5-CL1 | Tape wound CT with 150/5A, Inner diameter - 55mm | | |
| TWCT-T-D55-200/5A-VA5-CL1 | Tape wound CT with 200/5A, Inner diameter - 55mm | | |
| TWCT-T-D55-250/5A-VA5-CL1 | Tape wound CT with 250/5A, Inner diameter - 55mm | | |
| TWCT-T-D55-300/5A-VA5-CL1 | Tape wound CT with 300/5A, Inner diameter - 55mm | | |
| TWCT-T-D55-400/5A-VA5-CL1 | Tape wound CT with 400/5A, Inner diameter - 55mm | | |
| TWCT-T-D65-500/5A-VA5-CL1 | Tape wound CT with 500/5A, Inner diameter - 65mm | | |
| TWCT-T-D65-600/5A-VA5-CL1 | Tape wound CT with 600/5A, Inner diameter - 65mm | | |
| TWCT-T-D110-800/5A-VA10-CL0.5 | Tape wound CT with 800/5A, Inner diameter - 110mm | | |
| TWCT-T-D110-1000/5A-VA10-CL0.5 | Tape wound CT with 1000/5A, Inner diameter - 110mm | | |
| TWCT-T-D120-1000/5A-VA10-CL0.5 | Tape wound CT with 1000/5A, Inner diameter - 120mm | | |
| TWCT-T-D120-1200/5A-VA10-CL0.5 | Tape wound CT with 1200/5A, Inner diameter - 120mm | | |
| TWCT-T-D120-1600/5A-VA10-CL0.5 | Tape wound CT with 1600/5A, Inner diameter - 120mm | | |

POWER QUALITY




- Automatic Power Factor Controller
- Capacitor
- Advanced Static VAr Generator
- Power Quality Hybrid Solution
- Static Voltage Regulator

AUTOMATIC POWER FACTOR CONTROLLERS



AUTOMATIC POWER FACTOR CONTROLLERS



- Single CT and 3 CT variants available
- Available with four quadrant power factor controller
- Automatic sensing of capacitor bank values
- programmable up to 1 to 8/12 stages
- Variant available with no programming & built-in VAF meter
- Variant available for RS485 MODBUS communication
- 

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------------------|---|----------|----------|
| AUTOMATIC POWER FACTOR CONTROLLER | | | |
| APFC148-312-90/550V-CE | Power factor controller with 3CT, 12 Stage, LCD Display, 90 to 550V AC, 144 x 144 mm size | 90328910 | 13093 |
| APFC146-112-90/550V-CE | Power factor controller with 1CT, 12 Stage, LCD Display, 90 to 550V AC, 144 x 144 mm size | | 8277 |
| APFC346-108-230V-CE | Power factor controller with 1CT, 8 Stage, LCD Display, 85 to 270V AC, 96 x 96 mm size | | 6019 |
| APFC147-112-90/550V | Power factor controller with 1CT, 12 Stage, LED Display, 90 to 550V AC, 144 x 144 mm size | | 9293 |
| APFC147-108-90/550V | Power factor controller with 1CT, 8 Stage, LED Display, 90 to 550V AC, 144 x 144 mm size | | 8064 |
| APFC347-108-230V | Power factor controller with 1CT, 8 Stage, LED Display, 85 to 270V AC, 96 x 96 mm size | | 6019 |

CAPACITORS

New



- Fast discharge resistors
- Over pressure disconnection system (Only above 10KVAR)
- Internal fuse for protection
- Polyurethane self-extinguishing resin V0, developed under standard UL94
- MPP type
-  

| Product Code | Description | HSN Code | Unit MRP |
|---------------------------------|--|----------|----------|
| STANDARD DUTY CAPACITORS | | | |
| SDCAP01440 | Standard duty capacitor, 1.0 kVAr, 440V | 85321000 | 473 |
| SDCAP02440 | Standard duty capacitor, 2.0 kVAr, 440V | | 736 |
| SDCAP03440 | Standard duty capacitor, 3.0 kVAr, 440V | | 791 |
| SDCAP04440 | Standard duty capacitor, 4.0 kVAr, 440V | | 1054 |
| SDCAP05440 | Standard duty capacitor, 5.0 kVAr, 440V | | 1318 |
| SDCAP07440 | Standard duty capacitor, 7.5 kVAr, 440V | | 1976 |
| SDCAP10440 | Standard duty capacitor, 10.0 kVAr, 440V | | 2635 |
| SDCAP12440 | Standard duty capacitor, 12.0 kVAr, 440V | | 3162 |
| SDCAP15440 | Standard duty capacitor, 15.0 kVAr, 440V | | 3953 |
| SDCAP20440 | Standard duty capacitor, 20.0 kVAr, 440V | | 5270 |
| SDCAP25440 | Standard duty capacitor, 25.0 kVAr, 440V | | 6588 |
| HEAVY DUTY CAPACITORS | | | |
| HDCAP01440 | Heavy duty capacitor, 1.0 kVAr, 440V | 85321000 | 496 |
| HDCAP02440 | Heavy duty capacitor, 2.0 kVAr, 440V | | 819 |
| HDCAP03440 | Heavy duty capacitor, 3.0 kVAr, 440V | | 988 |
| HDCAP05440 | Heavy duty capacitor, 5.0 kVAr, 440V | | 1647 |
| HDCAP07440 | Heavy duty capacitor, 7.5 kVAr, 440V | | 2470 |
| HDCAP10440 | Heavy duty capacitor, 10.0 kVAr, 440V | | 3294 |
| HDCAP12440 | Heavy duty capacitor, 12.0 kVAr, 440V | | 3953 |
| HDCAP15440 | Heavy duty capacitor, 15.0 kVAr, 440V | | 4941 |
| HDCAP20440 | Heavy duty capacitor, 20.0 kVAr, 440V | | 6588 |
| HDCAP25440 | Heavy duty capacitor, 25.0 kVAr, 440V | | 8234 |
| HDCAP05480 | Heavy duty capacitor, 5.0 kVAr, 480V | | 1779 |
| HDCAP10480 | Heavy duty capacitor, 10.0 kVAr, 480V | | 3557 |
| HDCAP15480 | Heavy duty capacitor, 15.0 kVAr, 480V | | 5336 |
| HDCAP20480 | Heavy duty capacitor, 20.0 kVAr, 480V | | 7115 |
| HDCAP25480 | Heavy duty capacitor, 25.0 kVAr, 480V | | 8893 |
| HDCAP05525 | Heavy duty capacitor, 5.0 kVAr, 525V | | 2108 |
| HDCAP07525 | Heavy duty capacitor, 7.0 kVAr, 525V | | 3162 |
| HDCAP10525 | Heavy duty capacitor, 10.0 kVAr, 525V | | 4216 |
| HDCAP12525 | Heavy duty capacitor, 12.0 kVAr, 525V | | 5270 |
| HDCAP15525 | Heavy duty capacitor, 15.0 kVAr, 525V | | 6324 |
| HDCAP20525 | Heavy duty capacitor, 20.0 kVAr, 525V | | 8432 |
| HDCAP25525 | Heavy duty capacitor, 25.0 kVAr, 525V | | 10540 |

ADVANCED STATIC VAR GENERATOR

New

PRICE ON REQUEST



Solution to reduce kVAh units

ASVG

Power Factor > 0.99
Harmonic Mitigation upto 15th order

AHF

Range upto: 100A
Harmonic Mitigation upto 51st order

100kVAr

50kVAr

15kVAr

ASVG

- Available in 15kVAr, 50kVAr & 100kVAr
- Real time, Dynamic step-less compensation
- Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- Advance feature- Harmonic correction up to 15th order
- Instant response time of 50 µsec & full response in less than 1 cycle
- Compensates current unbalance created by the load
- IGBT technology

AHF

- Available in 50A & 100A
- Real time, Dynamic step-less compensation
- Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- Instant response time of 50 µsec & full response in less than 1 cycle
- Compensates current unbalance created by the load
- IGBT technology

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------|---|------------|------------|
| ASVG-015-WLL-4P-00-8R | ASVG-15KVAR- WallMount- 3 phase, 4 wire- 8 relay output | 8504.40.10 | On Request |
| ASVG-050-RCK-4P-04 | ASVG-50KVAR- RackMount- 3 phase, 4 wire- 4 inch HMI display | | |
| ASVG-050-WLL-4P-04 | ASVG-50KVAR- WallMount- 3 phase, 4 wire- 4 inch HMI display | | |
| ASVG-050-WLL-4P-XX | ASVG-50KVAR- WallMount / RackMount- 3 phase, 4 wire- without HMI display | | |
| ASVG-100-RCK-4P-04 | ASVG-100KVAR- RackMount- 3 phase, 4 wire- 4 inch HMI display | | |
| ASVG-100-WLL-4P-04 | ASVG-100KVAR- WallMount- 3 phase, 4 wire- 4 inch HMI display | | |
| ASVG-100-WLL-4P-XX | ASVG-100KVAR- WallMount / RackMount- 3 phase, 4 wire- without HMI display | | |
| AHF -050-RCK-4P-04 | AHF-50KVAR- RackMount- 3 phase, 4 wire- 4 inch HMI display | | |
| AHF -050-WLL-4P-04 | AHF-50KVAR- WallMount- 3 phase, 4 wire- 4 inch HMI display | | |
| AHF -050-WLL-4P-XX | AHF-50KVAR- WallMount / RackMount- 3 phase, 4 wire- 4 inch HMI display | | |
| AHF-100-RCK-4P-04 | AHF-100KVAR- RackMount- 3 phase, 4 wire- 4 inch HMI display | | |
| AHF -100-WLL-4P-04 | AHF-100KVAR- WallMount- 3 phase, 4 wire- 4 inch HMI display | | |
| AHF -100-WLL-4P-XX | AHF-100KVAR- WallMount / RackMount- 3 phase, 4 wire- without HMI display | | |

POWER QUALITY HYBRID SOLUTION *New*

PRICE ON REQUEST



- Hybrid Solution – Combination of Step based and Stepless compensation
- Improved capacitor life due to minimum switching
- Instant response time of 50 μ sec & full response in less than 1 cycle for ASVG
- Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- Detuned reactor with every capacitor
- Advance feature- Harmonic correction up to 15th order
- Reputed make Switchgear
- Easy to expand using common controller
- 18 step relay output

ORDERING INFORMATION

Eg : HYPNL-ASVG-100-50-R

| Product Series | Product Type | Power (kVAR) | ASVG Rating | Output Type |
|----------------|--------------|---|-------------|--------------------|
| HYPNL | ASVG | 100 / 125 / 150 / 200 / 250 / 300 / 350 / 400 / 450 / 500 | 50 / 100 | Relay / Transistor |

ACCESSORIES - COMMON CONTROLLER

Eg : HYHMI-7-18-S

| Product Name | Product Series | Display Screen | Relay Output | Communication |
|-------------------|----------------|----------------|--------------|---------------|
| Common Controller | HYHMI | 7" | 18 | S |

Price list 2023 (w.e.f. January 24th, 2023)

STATIC VOLTAGE REGULATOR

PRICE ON REQUEST

New

Instantaneous Voltage Correction
for Protection of
Precision Equipments



- Range : 1Ø : 2.5 kVA to 10 kVA ; 3Ø : 7.5 kVA to 100 kVA
- Fault Correction Time : 20msec
- Protection : Over / Under voltage, Over load, Over current
- Mitigates voltage sags & swell in accordance with standards
- Auto / Manual bypass mode
- Normal operating voltage range (for 1% output voltage regulation)
1Ø : 180 - 280V AC ; 3Ø : 320 - 480V AC
- Relaxed operating voltage range (for 10% output voltage compensation)
1Ø : 160 - 300V AC ; 3Ø : 277 - 520V AC
- Selectable output voltage - 1Ø : 220 / 230 / 240V ; 3Ø : 380 / 400 / 415V
- IGBT Technology

| Product Code | Description | HSN Code | Unit MRP |
|-----------------------|---|------------|------------|
| SINGLE PHASE | | | |
| SINE-1P-2.5-180/280V | Static voltage regulator 1 Phase 2.5kVA Operating range 180V to 280V | 9032.89.10 | On Request |
| SINE-1P-5-180/280V | Static voltage regulator 1 phase 5kVA Operating range 180V to 280V | | |
| SINE-1P-7.5-180/280V | Static voltage regulator 1 Phase 7.5kVA Operating range 180V to 280V | | |
| SINE-1P-10-180/280V | Static voltage regulator 1 Phase 10kVA Operating range 180V to 280V | | |
| SINE-3P-15-340/480V | Static voltage regulator 3 Phase 15kVA Operating range 340V to 480V | | |
| SINE-3P-22.5-340/480V | Static voltage regulator 3 Phase 22.5kVA Operating range 340V to 480V | | |
| SINE-3P-30-340/480V | Static voltage regulator 3 Phase 30kVA Operating range 340V to 480V | | |
| SVR-3P-50-320/480V | Static voltage regulator 3 Phase 50kVA Operating range 320V to 480V | | |
| SVR-3P-75-320/480V | Static voltage regulator 3 Phase 75kVA Operating range 320V to 480V | | |
| SVR-3P-100-340/480V | Static voltage regulator 3 Phase 100kVA Operating range 340V to 480V | | |

Price list 2023 (w.e.f. January 24th, 2023)

ELECTRICAL PROTECTION & CONTROL

LINE MONITORING RELAY

New



CURRENT PROTECTION RELAY



EARTH LEAKAGE RELAY



EARTH FAULT RELAY



MOTOR PROTECTION RELAY



PUMP PROTECTION RELAY



DIGITAL TIME SWITCH



TIME RELAYS



LINE MONITORING SERIES

New



LINE MONITORING RELAY

- 1Ø-2W, 3Ø-3W, 3Ø-4W suitable models
- Wide range of supply range available
- Neutral loss feature in selective model
- On site field programmable trip and alarm relay
- Compact space saving design
- Clear Trip indication on LED and LCD

| Product Code | Description | HSN Code | Unit MRP |
|---|---|----------|----------|
| DIGITAL VOLTAGE PROTECTION RELAY | | | |
| 900VPR-BL-U-CE | 3Ø-3W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, Neutral loss, 2 x 1 C/O, 85 to 270V AC / DC | 85363000 | 4352 |
| 900VPR-2-280/600V-CE | 3Ø-3W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, Neutral loss, 2 x 1 C/O, Self powered | | 2482 |
| VPRD2M-BL-CE | Digital, 1Ø-2W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, With Backlight, 2 C/O DPDT | | 2309 |
| 600DVR-CE <i>New</i> | 3Ø-3W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, Under / Over frequency, Neutral Loss, 1 C/O, Self powered | | 2044 |
| ANALOG VOLTAGE PROTECTION RELAY | | | |
| 600VPR-310/520V-CE | 3Ø-3W, Under / Over voltage, Phase failure, Phase sequence, 1C/O | 85363000 | 1965 |
| VPRA2M-CE | Analog, 1Ø-2W, 3Ø-4W, Under / Over voltage, Phase failure, Phase sequence, Phase asymmetry, 2 C/O DPDT | | 1763 |
| 800VPR-3 | 3Ø-3W, Under / Over voltage, Phase failure, Phase sequence, 1 C/O | | 1265 |
| 600VPR-1-130/320V-CE | 1Ø-2W, Under / Over voltage, Phase failure, Phase sequence, 1C/O | | 1541 |
| PHASE SEQUENCE RELAY | | | |
| 600PSR-CE | 3Ø-3W, Phase failure, Phase sequence, Phase asymmetry, 1 C/O, 17.5mm size | 85363000 | 1308 |
| 640PSR-V-CE <i>New</i> | 3Ø-3W Phase Failure Relay with Phase asymmetry of 40V / 65V selectable, SPP / PSR selectable, Time delay for tripping, UV / OV -On/Off selectable, Multiple LED for Fault indication, 17.5mm Din Rail | | 1068 |
| 640PSR-CE <i>New</i> | 3Ø-3W Phase Failure Relay with Phase asymmetry of 40V. Multiple LED for Fault indication, 17.5mm Din Rail | | 1011 |
| 800PSR | 3Ø-3W, Phase failure, Phase sequence, Phase asymmetry, 1 C/O, 22.5mm size | | 828 |
| SINGLE PHASE PREVENTER | | | |
| 600SPP | 3Ø-3W, Phase failure, Phase asymmetry, 1 C/O | 85363000 | 1408 |
| SPPA2M2 | 3Ø-3W, Under / Over voltage, Phase failure, Phase asymmetry, 2 C/O DPDT | | 1576 |
| AUTO SWITCH | | | |
| Auto switch-313/457V | Single Phase preventer with user selectable mode, Under voltage - 313V, Over voltage 475V | 85363000 | 1154 |
| Auto switch-195/400V | Single Phase preventer with user selectable mode, Under voltage - 195V, Over voltage 400V | | 1154 |

CURRENT MONITORING SERIES



CURRENT PROTECTION RELAY

- Definite time tripping
- Wide tripping range (1 to 999A)
- Continuous monitoring of Over and Under current in 1 phase and 3 phase
- Wide supply range of supply: 85 to 270V AC/DC
- Field programmable trip current and trip time through front panel keys
- Manual test & Reset Keys available via Front / Remote

| Product Code | Description | HSN Code | Unit MRP |
|---------------------------------|---|----------|----------|
| CURRENT PROTECTION RELAY | | | |
| 900CPR-1-BL-U-CE | 1Ø, Backlight, Over / Under current monitoring, 2 x 1 C/O, 85 to 270V AC / DC | 85363000 | 3648 |
| 900CPR-3-230V | 1Ø & 3Ø, Over / Under current monitoring, Current asymmetry, 1 C/O, 230V AC | | 3197 |
| 900CPR-1-230V | 1Ø, Over / Under current monitoring, 1 C/O, 230V AC | | 2685 |



EARTH LEAKAGE RELAY

- Type AC leakage current measurement from 30 mA to 30 A
- Highly sensitive CBCT using Nanocrystalline core
- High Sensitivity - tripping within 50 msec for 1X current and 30msec for 5X current
- Discrete LED indication for Power ON, Alarm and Fault
- Fixed variant for leakage current measurement is also available

| Product Code | Description | HSN Code | Unit MRP |
|----------------------------|---|----------|----------|
| EARTH LEAKAGE RELAY | | | |
| 900ELR-2-230V-CE | Digital earth leakage relay, Leakage Current range: 30mA to 30A, 2 x 1 C/O, 230V AC | 85363000 | 4344 |
| ELR-341-1 | Panel Mount ELR, Leakage Current range: 30mA to 30A, 85 to 270 V AC/DC | | 3070 |
| ELRA2M2-1-230V-CE | Analog earth leakage relay, Leakage current range: 30mA to 30A , 1 C/O, 230V AC | | 2086 |
| ELCTR35-1-30mA-230V-CE | Earth leakage relay with inbuilt CBCT Leakage current fixed: 30mA, 1 C/O, 230V AC | | 1661 |
| ELCTR35-1-300mA-230V-CE | Earth leakage relay with inbuilt CBCT, Leakage current fixed: 300mA, 1 C/O, 230V AC | | 1661 |
| 600ELR-1-30/500mA-230V | Analog earth leakage relay, Leakage current range: 30mA to 500mA, 1 C/O, 230V AC, 1M size | | 1502 |

Note: * UL variant available

Price list 2023 (w.e.f. January 24th, 2023)

| Product Code | Description | HSN Code | Unit MRP |
|---------------------------------|---|----------|----------|
| EARTH LEAKAGE RELAY ACCESSORIES | | | |
| CBCT-310-1-CE | Core balance current transformer with Dia 310mm | 85364900 | 8872 |
| CBCT-210-1-CE | Core balance current transformer with Dia 210mm | | 5192 |
| CBCT-120-1-CE | Core balance current transformer with Dia 120mm | | 2969 |
| CBCT-70-1-CE | Core balance current transformer with Dia 70mm | | 1343 |
| CBCT-35-1-CE | Core balance current transformer with Dia 35mm | | 921 |



EARTH FAULT RELAY

- Continuous monitoring of fault current in 1 phase and 3 phase
- Wide supply range of supply: 85 to 270V AC/DC
- Field programmable trip current and trip time through front panel keys
- Manual test & Reset Keys available via Front / Remote
- Programmable Trip and Alarm relay
- Specialized current transformer with class 1 accuracy
- Works with standard 5A CT (Only for EFR-341-2-CE)

| Product Code | Description | HSN Code | Unit MRP |
|-------------------------------|---|----------|----------|
| EARTH FAULT RELAY | | | |
| 900EFR-BL-U-CE | Digital Din Rail mount earth fault relay, 2 x 1 C/O, 85 to 270V AC / DC | 85363000 | 4153 |
| EFR-341-2-CE <i>New</i> | Digital Panel mount earth fault relay, 2 x 2 C/O, 85 to 270V AC / DC | | 3070 |
| EARTH FAULT RELAY ACCESSORIES | | | |
| EFCT 220/50 630 /1A VA1 CL1 | Earth fault current transformer 630A, Window Size: 220x50 mm | 85043100 | 2182 |
| EFCT 180/35 630 /1A VA1 CL1 | Earth fault current transformer 630A Window Size: 180x35 mm | | 2152 |
| EFCT 180/35 250 /1A VA1 CL1 | Earth fault current transformer 250A, Window Size: 180x 35 mm | | 1613 |
| EFCT 140/35 250/1A VA1 CL1 | Earth fault current transformer 250A, Window Size: 140x35 mm | | 1639 |
| EFCT 140/35 160/1A VA1 CL1 | Earth fault current transformer 160A, Window Size: 140x 35 mm | | 1425 |
| EFCT 100/25 160/1A VA1 CL1 | Earth fault current transformer 160A, Window Size: 100x25 mm | | 1023 |

MOTOR & PUMP PROTECTION RELAYS



MOTOR PROTECTION RELAY

- Smart and Intelligent motor protection with continuous fault monitoring & control
- Monitors Overload as per International tripping class 5, 10, 15, 20, 30 (NEMA)
- Specialized Current transformer for 3 phase applications
- Relays self-diagnostics improves on site troubleshooting
- Panel Mount / DIN Rail variants available
- Direct measurement of temperature in the stator winding via PTC Sensor

| Product Code | Description | HSN Code | Unit MRP |
|------------------------------------|---|----------|-------------|
| MOTOR PROTECTION RELAY | | | |
| MPR-341-2 | Digital panel mount motor protection relay, 2 x 1C/O, 85 to 270V AC / DC | 85363000 | 2964 |
| MPR-3M-2-415V | Analog motor protection relay, 2 C/O, 415V | | 2958 |
| MPR-3M-2-230V | Analog motor protection relay, 2 C/O, 230V | | 2697 |
| THERMISTOR PROTECTION RELAY | | | |
| TPRA2M1-1-U-CE | Thermistor protection relay for motor winding protection, 2 C/O, 90 to 270V AC / DC | 85363000 | 2213 |



PUMP PROTECTION RELAY

- Smart and Intelligent device with fault monitoring and control
- Monitors Overload as per International tripping class 5, 10, 15, 20, 30 (NEMA)
- Specialized Current transformer for 3 phase applications
- Voltage protection (OV, UV, Hysteresis, Asymmetry)
- Current protection (OC, UC, Locked rotor, Asymmetry)
- Direct current measurement up to 30A in 1 Phase products
- Built in Water level controller available in selective variant
- Two tank water level monitoring with specially designed non corrosive sensor

| Product Code | Description | HSN Code | Unit MRP |
|--|---|----------|-------------|
| PUMP PROTECTION RELAY | | | |
| PPRD-4M-3-415V | 3Ø-3W, Digital pump protection relay, Push button type, Up to 80A via MPCT, 1 C/O, 415V | 85363000 | 2602 |
| PPRA-4M-3-415V | 3Ø-3W, Analog pump protection relay, Up to 80A via MPCT, 1 C/O, 415V | | 2583 |
| PPRD-4M-1 | 1Ø-2W, Digital Pump Protection relay with WLC, Direct 30A | | 2565 |
| PPRD-4M-1-230V | 1Ø-2W, Digital Pump Protection relay, Direct 30A | | 2321 |
| PPRA-4M-1-230V | 1Ø-2W, Analog Pump Protection relay, Direct 30A | | 2292 |
| MOTOR & PUMP PROTECTION RELAY ACCESSORIES | | | |
| MPCT D15 80A | Motor protection current transformer, up to 80A | 85043100 | 1109 |
| MPCT D15 40A | Motor protection current transformer, up to 40A | | 972 |
| MPCT D15 10A | Motor protection current transformer, up to 10A | | 851 |
| LIQUID LEVEL CONTROLLER | | | |
| LLCA-2M-1-U-CE <i>New</i> | Single / Dual tank liquid level controller, 1 C/O SPDT, Automatic sensitivity - 0 to 500Kohms, 85 to 270V AC / DC | 90328910 | 1848 |
| WLCA2M1-CE-RoHS | Water level controller, Adjustable sensitivity 1K to 200K Ohm with sensor | | 1848 |
| WLC Sensor | Set of 3 stainless sensor with LLC / WLC | | 369 |

Note: * UL variant available

Price list 2023 (w.e.f. January 24th, 2023)

TIME SWITCH & ANALOG TIMERS



DIGITAL TIME SWITCH

- Daily / Weekly or Astronomical function
- 30-50 ON-OFF steps
- Relay ratings: 16A / 20A
- Min.setting unit: 1 second
- 10 years battery life

| Product Code | Description | HSN Code | Unit MRP |
|----------------------|--|----------|----------|
| DIGITAL TIME SWITCH | | | |
| ATS2M1-1-16A-230V-CE | DIN Rail - astronomical time switch, 1 C/O, 230V AC | 91070000 | 2758 |
| TS2M1-2-16A-230V-CE | DIN Rail - daily / weekly time switch, Dual Channel, 2 X 1 C/O SPDT, 230V AC | | 2599 |
| TS2M1-1-16A-230V V2 | DIN Rail - daily / weekly time switch, 1 C/O, 230V AC | | 1921 |
| TS1W1-1-20A-230V | Wall mount - daily / weekly time switch, 1C/O, 230V AC | | 1596 |



ANALOG TIME SWITCH

- 24 hrs program
- 96 ON-OFF steps
- Min. setting unit: 15 minutes
- Power reserve: 10 hrs


| Product Code | Description | HSN Code | Unit MRP |
|---------------------|--|----------|----------|
| ANALOG TIME SWITCH | | | |
| MTS4M-1-16A-230V-CE | DIN Rail / Flush mount - Mechanical daily / weekly time switch, 16A relay, 1 C/O SPDT, 230V AC | 91070000 | 1921 |



TIME RELAYS

- Single & Multifunction timers available
- Wide setting ranges
- Universal power supply
- Precise time setting
- Panel or DIN rail mount

| Product Code | Description | HSN Code | Unit MRP |
|----------------------------------|--|----------|----------|
| DIN RAIL TIMERS - 17.5MM | | | |
| 600DT * | Digital multi function timer, 0.1 sec to 999hr, 1 C/O, 20 to 240V AC & 12 to 240V DC | 85364900 | 2058 |
| 600SD-2-230 | Star Delta timer, 3 sec to 60 sec, 2 C/O, 230V AC | | 1722 |
| 600XU-A-1-CU | Multi function timer, 0.1 sec to 3 hr, 1 C/O, 20 to 240V AC & 12 to 240V DC, UL certified | | 1678 |
| 642XA | Timer with On delay / Interval modes, 0sec to 60mins, 1 C/O, 20 to 240V AC & 12 to 240V DC | | 1306 |
| 600ST * | Single function timer, 0.1 sec to 3 hr, 1 C/O, 240V AC | | 1270 |
| 642SQ-A | Timer with On delay / Interval modes, 0sec to 60mins, 1 C/O, 230V AC & 24V DC | | 892 |
| DIN RAIL TIMERS - 22.5MM | | | |
| 800POD-180S | True power off delay timer, 180sec, 2 C/O, 110 to 240V AC | 85364900 | 4116 |
| 800XMR | Forward - pause - reverse timer, On time: 1 to 8min Pause time: 10 to 80sec 2 C/O, 20 to 240V AC & 12 to 240V DC | | 2339 |
| 800XC * | Asymmetrical Cyclic timer, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC | | 1686 |
| 800XU * | Timer with On delay / Interval modes, 1sec to 30hr, 2 C/O, 20 to 240V AC & 12 to 240V DC | | 1534 |
| 800SD-2-110 | Star Delta timer, Run time: 30 / 60sec, Change over: 50 / 100ms, 2 C/O, 110V AC | | 1306 |
| 800SD-2-230 | Star Delta timer, Run time: 30 / 60sec, Change over: 50 / 100ms, 2 C/O, 230V AC | | 1042 |
| 800SD-2-415 | Star Delta timer, Run time: 30 / 60sec, Change over: 50 / 100ms, 2 C/O, 230 to 450V AC | | 1246 |
| 800S-1-ON-60S-415 | Single function, 60sec, 1 C/O, 415V AC | | 1149 |
| 800S-1-ON-60S-230 | Single function, 60sec, 1 C/O, 230V AC | | 822 |
| 800XA | Timer with On delay / Interval modes, 3sec to 60mins, 2 C/O, 20 to 240V AC & 12 to 240V DC | | 1117 |
| 800SQ-A | Timer with On delay / Interval modes, 3sec to 60mins, 1 C/O, 230V AC & 24V AC / DC | 829 | |
| ANALOG PANEL MOUNT TIMERS | | | |
| 55XC-T-G * <i>New</i> | Panel mount timer with cyclic function, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC | 85364900 | 1987 |
| 55XU-T-G * <i>New</i> | Panel mount timer with On delay / Interval modes, 1sec to 30hr, 2 C/O, 20 to 240V AC & 12 to 240V DC | | 1922 |
| 55XC-P8-G * <i>New</i> | Plug in timer with cyclic function, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC | | 1824 |
| 55MF-P11 <i>New</i> | 11Pin Output, Plug in multifunction timer, 0.05sec to 300hr, 2 X 1 C/O SPDT, 20-240V AC/ DC | | 1824 |
| 55XU-P8-G * <i>New</i> | Plug in timer with On delay / Interval modes, 1sec to 10hr, 2 C/O, 20 to 240V AC & 12 to 240V DC | | 1726 |
| 55MF-P8 <i>New</i> | 8Pin Output, Plug in multifunction timer, 0.05sec to 300hr, 2 X 1 C/O SPDT, 20-240V AC/ DC | | 1726 |
| 55Q(V1.1)-T8-230 | Panel mounted On Delay / Interval Timer, 0sec to 60min, 230V AC | | 1388 |
| 55Q(V1.1)-P8-230 | Plug in timer with On Delay / Interval Timer, 0sec to 60min, 230V AC | | 1382 |
| 55ES-P8-230V-G <i>New</i> | Plug in timer with On delay / Interval modes, 3sec to 60min, 1 C/O, 230V AC & 24V AC / DC | | 1105 |
| 55ES-T-230V-G <i>New</i> | Panel mount timer with On delay / Interval modes, 3sec to 60min, 1 C/O, 230V AC & 24V AC / DC | | 984 |



ALARM ANNUNCIATOR

- 8 Windows, 6 colours
- MODBUS RS485 MODBUS RTU serial communication
- 90 to 270VAC aux supply
- Selectable fault detection NO/NC sensing
- Programmable individual window
- Relay contacts for trip & buzzer


| Product Code | Description | HSN Code | Unit MRP |
|----------------|---|----------|----------|
| WINDOWS | | | |
| AN-8-0-0-230V | Fault annunciator – 8 Window, Multicolour | 85318000 | 7630 |

Note: * UL variant available

Price list 2023 (w.e.f. January 24th, 2023)

SOLAR ON GRID INVERTER *New*

PRICE ON REQUEST



30kW, 33kW, 50kW



06kW, 10kW

Three Phase



4.2kW, 5.2kW, 6kW



1.5kW, 2.5kW, 3.3kW

Single Phase


- 7 Year limited warranty
- Indigenously developed technology
- SELEC IOT™ subscription

| Product Code | Description | HSN Code | Unit MRP |
|---------------------|--|------------|------------|
| SINGLE PHASE | | | |
| GTI001WLM1PW | Grid Tie Inverter -1.5 kW, Wall mounted 1 phase with Wifi Module | 8504.40.10 | On Request |
| GTI002WLM1PW | Grid Tie Inverter -2.5 kW, Wall mounted 1 phase with Wifi Module | | |
| GTI003WLM1PW | Grid Tie Inverter -3.3 kW, Wall mounted 1 phase with Wifi Module | | |
| GTI004WLM1PW | Grid Tie Inverter -4.2 kW, Wall mounted 1 phase with Wifi Module | | |
| GTI005WLM1PW | Grid Tie Inverter -5.2 kW, Wall mounted 1 phase with Wifi Module | | |
| GTI006WLM1PW | Grid Tie Inverter -06 kW, Wall mounted 1 phase with Wifi Module | | |
| THREE PHASE | | | |
| GTI006WLM3PW | Grid Tie Inverter -06 kW, Wall mounted 3 phase with Wifi Module | 8504.40.10 | On Request |
| GTI010WLM3PW | Grid Tie Inverter -10 kW, Wall mounted 3 phase with Wifi Module | | |
| GTI030WLM3PW | Grid Tie Inverter -30 kW, Wall mounted 3 phase with Wifi Module | | |
| GTI033WLM3PW | Grid Tie Inverter -33 kW, Wall mounted 3 phase with Wifi Module | | |
| GTI050WLM3PW | Grid Tie Inverter -50 kW, Wall mounted 3 phase with Wifi Module | | |
| GTI0100WLM3PW | Grid Tie Inverter -100 kW, Wall mounted 3 phase with Wifi Module | | |



“Bringing Micro-Modularity to programming controller”

“Tailoring your needs, building brick by brick”

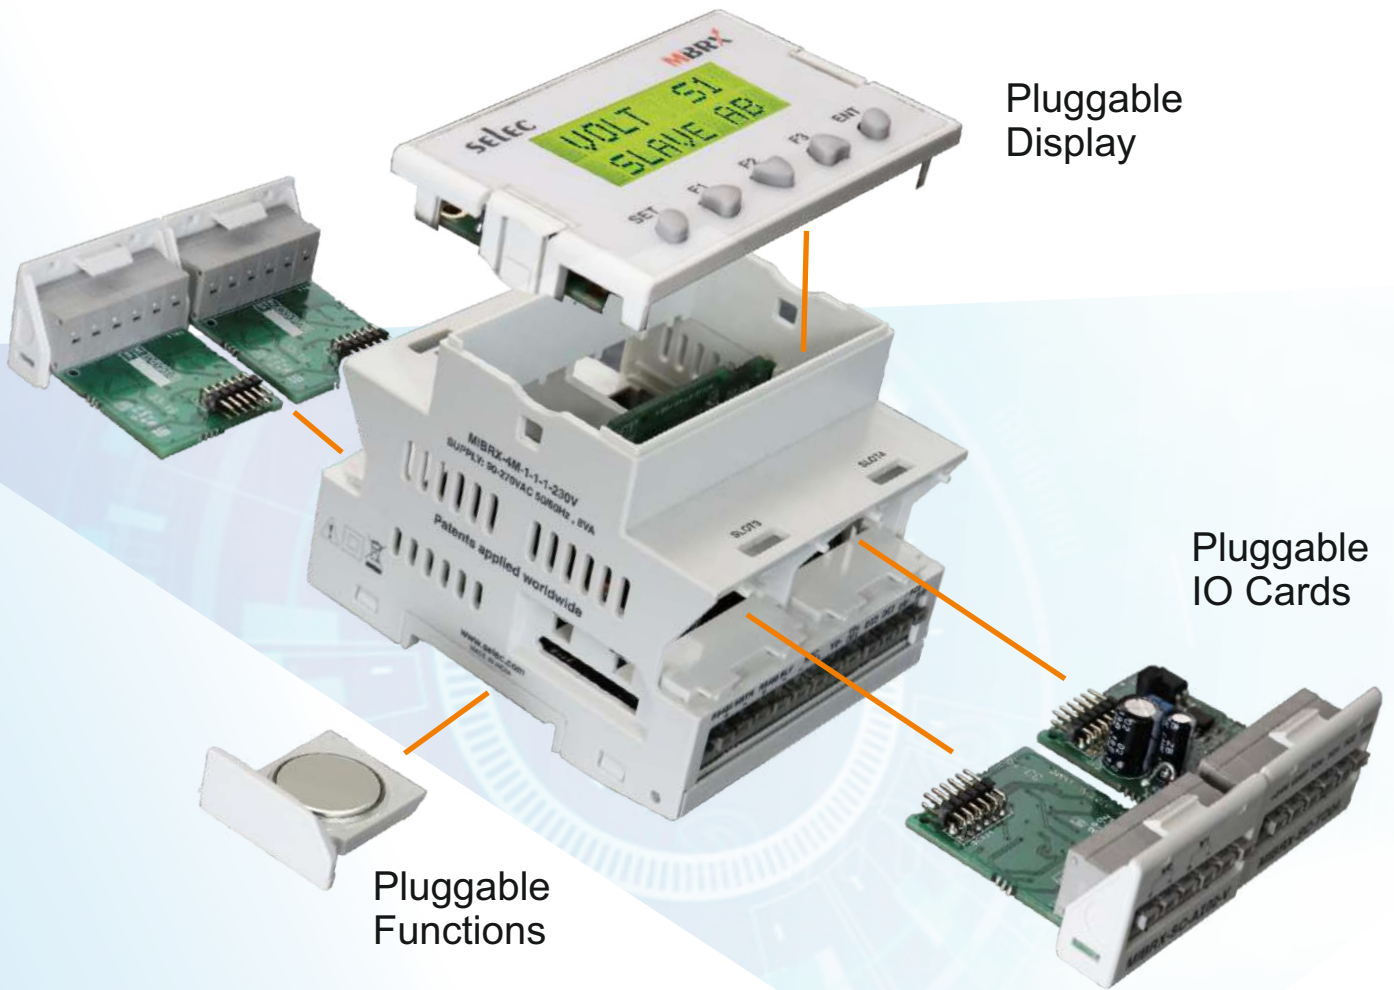

Pluggable Display

Pluggable IO Cards

Pluggable Functions

**PATENT APPLIED
WORLDWIDE**



Discontinued & Alternate codes

| Discontinued | Alternate |
|--------------------------|----------------------|
| MFM376-230V | MFM376-CE |
| EM306A-C | EM306-C-D |
| EM306A | EM306 |
| 900VPR-2-300/600V | 900VPR-2-280/600V-CE |
| 900VPR-2-280/520V-CE | 900VPR-2-280/600V-CE |
| 642PSR | 640PSR-CE |
| WLCA-2M-U-CE | LLCA-2M-1-U-CE |
| 55XC-P8 | 55XC-P8-G |
| 55XC-T8 | 55XC-T-G |
| 55ES-P8-230 | 55ES-P8-230V-G |
| 55ES-T-230 | 55ES-T-230V-G |
| 55XU-P | 55XU-P8-G |
| 55XU-T | 55XU-T-G |
| HDCAP 60x200 01 440 | HDCAP01440 |
| HDCAP 60x200 2.5 440 | HDCAP02440 |
| HDCAP 70x260 05 440 | HDCAP05440 |
| HDCAP 70x260 7.5 440 | HDCAP07440 |
| HDCAP-70x260-10-440-CE | HDCAP10440 |
| HDCAP-85x260-12.5-440-CE | HDCAP12440 |
| HDCAP-85x260-15-440-CE | HDCAP15440 |
| HDCAP-100x260-20-440-CE | HDCAP20440 |
| HDCAP-120x265-25-440-CE | HDCAP25440 |
| HDCAP 60x200 05 480-CE | HDCAP05480 |
| HDCAP-85x260-10-480-CE | HDCAP10480 |
| HDCAP-100x260-15-480-CE | HDCAP15480 |
| HDCAP-120x265-20-480-CE | HDCAP20480 |
| HDCAP-120x265-25-480-CE | HDCAP25480 |
| HDCAP 60x200 5 525-CE | HDCAP05525 |
| HDCAP-85x260-10-525-CE | HDCAP10525 |
| HDCAP-100x260-15-525-CE | HDCAP15525 |
| HDCAP-120x265-20-525-CE | HDCAP20525 |
| HDCAP-120x265-25-525-CE | HDCAP25525 |



Head Office :

Selec Controls Pvt. Ltd.

EL-27/1, Electronic Zone, TTC Industrial Area, MIDC,
Mahape, Navi Mumbai 400710, INDIA.

Tel.: +91-22-4141 8468 / 452. Fax: +91-22-41418 408.

Email: sales@selec.com

www.selec.com

Subsidiaries:

Selec GmbH

Selec USA

Selec Australia

For more information, visit our website at : www.selec.com

- All Prices are in Indian Rupees.
- Maximum Retail Price (MRP) is inclusive of all taxes.
- Tax incidence on invoices is basis applicable GST rates.
- Product evolution is a continuous process and Selec reserves the right to modify/withdraw any product at any time without prior notice.
- Prices are subject to change without notice.
- Prices charged will be as prevailing on the date of dispatch.

Technical Support:

Email: salestech@selec.com

Tel.: +91-22-4141 8468 / 452

Monday to Saturday, 9:00AM - 5:30PM

Distributor: